


GR Straight reducer
24° cone end


GR Gerade Reduzierung 24° Anschluss

PREMOEM
PREMIUM HYDRAULIC SOLUTIONS - GERMANY

Order code without nut and cutting ring
XRN....(X244...)

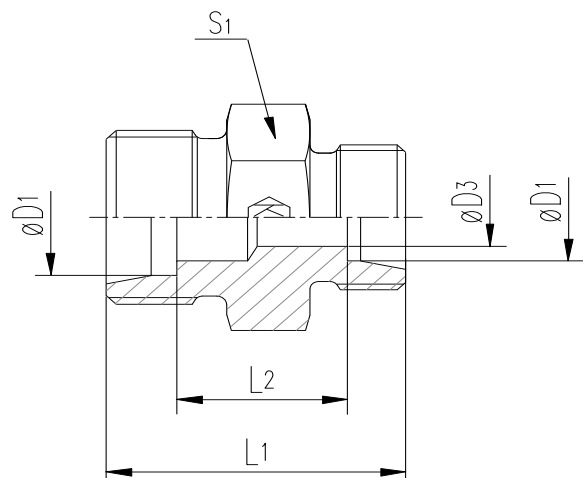

Order code with nut and cutting ring
RN....(244...)

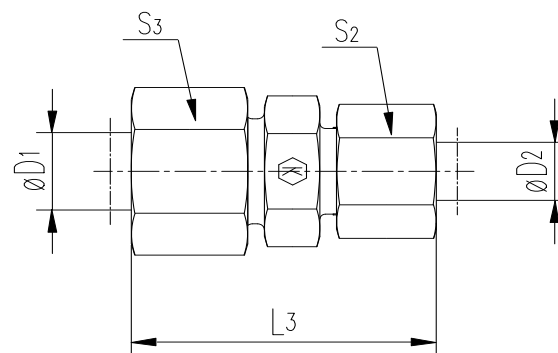

Series	Tube ØD1	Tube ØD2	D3	L1	L2	L3	S1	S2	S3	Weight g/1 piece	ITEM CODE	ITEM NAME	PN (bar)
LL DB	6	4	3.0	20	10.5	32	11	10	12	7	244100604	RN6DB4	100
	8	4	3.0	22	12.5	34	12	10	14	9	244100804	RN8DB4	100
	8	6	4.5	22	11.0	34	12	12	14	11	244100806	RN8DB6	100
L NB	8	6	4.0	25	11.0	40	14	14	17	16	244200806	RN8NB6	315
	10	6	4.0	26	12.0	41	17	14	19	21	244201006	RN10NB6	315
	10	8	6.0	26	12.0	41	17	17	19	21	244201008	RN10NB8	315
	12	6	4.0	27	13.0	42	19	14	22	26	244201206	RN12NB6	315
	12	8	6.0	27	13.0	42	19	17	22	26	244201208	RN12NB8	315
	12	10	8.0	28	14.0	43	19	19	22	29	244201210	RN12NB10	315
	15	10	8.0	29	15.0	45	24	19	27	46	244201510	RN15NB10	315
	15	12	10.0	29	15.0	45	24	22	27	45	244201512	RN15NB12	315
	18	10	8.0	30	15.5	46	27	19	32	65	244201810	RN18NB10	315
	18	12	10.0	30	15.5	46	27	22	32	64	244201812	RN18NB12	315
	18	15	12.0	31	16.5	48	27	27	32	65	244201815	RN18NB15	315
	22	12	10.0	32	17.5	48	32	22	36	80	244202212	RN22NB12	160
	22	15	12.0	33	18.5	50	32	27	36	89	244202215	RN22NB15	160
	22	18	15.0	33	18.0	50	32	32	36	89	244202218	RN22NB18	160
	28	18	15.0	34	19.0	52	41	32	41	142	244202818	RN28NB18	160
28	22	19.0	36	21.0	54	41	36	41	139	244202822	RN28NB22	160	
35	22	19.0	39	21.0	59	46	36	50	202	244203522	RN35NB22	160	
35	28	24.0	39	21.0	59	46	41	50	206	244203528	RN35NB28	160	
42	35	30.0	43	21.5	66	55	50	60	330	244204235	RN42NB35	160	
S YB	8	6	4.0	32	18.0	47	17	17	19	35	244300806	RN8YB6	630
	10	6	4.0	32	17.5	48	19	17	22	41	244301006	RN10YB6	630
	10	8	5.0	32	17.5	48	19	19	22	42	244301008	RN10YB8	630
	12	6	4.0	34	19.5	50	22	17	24	56	244301206	RN12YB6	630
	12	8	5.0	34	19.5	50	22	19	24	57	244301208	RN12YB8	630
	12	10	7.0	34	19.0	51	22	22	24	59	244301210	RN12YB10	630
	14	10	7.0	36	20.5	54	24	22	27	70	244301410	RN14YB10	630
	14	12	8.0	36	20.5	54	24	24	27	72	244301412	RN14YB12	630
	16	10	7.0	36	20.0	54	27	22	30	80	244301610	RN16YB10	400
	16	12	8.0	36	20.0	54	27	24	30	87	244301612	RN16YB12	400
	16	14	10.0	36	21.5	57	27	27	30	79	244301614	RN16YB14	400
	20	10	7.0	40	22.0	60	32	22	36	129	244302010	RN20YB10	400
	20	12	8.0	40	22.0	60	32	24	36	131	244302012	RN20YB12	400
	20	16	12.0	42	23.0	63	32	30	36	134	244302016	RN20YB16	400
	25	16	12.0	46	25.5	68	41	30	46	236	244302516	RN25YB16	400
	25	20	16.0	48	25.5	71	41	36	46	235	244302520	RN25YB20	400
	30	20	16.0	50	26.0	74	46	36	50	299	244303020	RN30YB20	400
30	25	20.0	52	26.5	77	46	46	50	317	244303025	RN30YB25	400	
38	30	25.0	59	29.5	87	55	50	60	522	244303830	RN38YB30	315	

LL= very light series

L= light series

S= heavy series

$\frac{PN \text{ (bar)}}{10} = PN \text{ (MPa)}$

Zinc plated=Cr(VI)-free